Regular expressions

1.1. Cheatsheet



Regex Cheatsheet (MIT)

Davechild Regular Expressions (Cheatography)

1.2. QuickStart

From http://www.rexegg.com/regex-quickstart.html^[1]

Character	Legend	Example	Sample Match
\d	One digit	file_\d\d	file_25
\w	One "word character": letter, underscore or dig	git\w-\w\w\w	A-b_1
\s	One white space character (e.g.: a tab)	ab\s\s\sc	ab c
\D	One character that is not a digit	\D\D\D	ABC
\W	One character that is not a word character	\W\W\W\W\W	*-+=)
\S	One character that is not a space	\S\S\S\S	Yoyo

Quantifier	Legend	Example	Sample Match
+	One or more	Version \w-\w+	Version A-b1_1
{3}	Exactly three times	\D{3}	ABC
{2,4}	Two to four times	\d{2,4}	156
{3,}	Three or more times	\w{3,}	regex_tutorial
*	Zero or more times	A*B*C*	AAACC
?	Once or none	plurals?	plural

Character	Legend	Example	Sample Match
	Any character except new line	a.c	abc
	Any character except new line	.*	whatever, man.
\.	A period (special character: needs to be escaped by a	a \)a\.c	a.c
\	Escapes a special character	\.*\+\? \\$\ \/\\	.*+? \$/\
\	Escapes a special character	\\{\(\)\}\	{()}

Logic	Legend	Example	Sample Match
I	OR operand	22 33	33
()	Capturing group	A(nt pple)	Apple (captures "pple")
\1	Contents of Group 1	r(\w)g\1x	regex
\2	Contents of Group 2	$(\d\d) + (\d\d) = \2 + \1$	12+65=65+12

Non-capturing group	A(?:nt pple)	Apple	
non captaining group	, (()) (P P P	, ippic	

(?:

Character	Legend	Example	Sample Match
\t	Tab	$T\t\w{2}$	T ab
\r	Return character	see below	
\n	New line character	see below	
\r\n	New line in Windows	AB\r\nCD	AB
			CD

Quantifier	Legend	Example	Sample Match
+	The + (one or more) is "greed	y"\d+	12345
?	Makes quantifiers "lazy"	\d+?	1 in 1 2345
*	The * (zero or more) is "greedy	y"A*	AAA
?	Makes quantifiers "lazy"	A*?	empty in AAA
{2,4}	Two to four times, "greedy"	\w{2,4}	abcd
?	Makes quantifiers "lazy"	\w{2,4}?	ab in ab cd

Character	Legend	Example	Sample Match
stuff	One of the characters in the brackets	AEIOU	One uppercase vowel
-	Range indicator	a-z	One lowercase letter
stuff	One of the characters in the brackets	AB1-5w-z	One of either: A,B,1,2,3,4,5,w,x,y,z
stuff	One of the characters in the brackets	A-Z+	GREAT
^x	One character that is not x	^a-z{3}	A1!
\d\D	One character that is a digit or a non-di	git\d\D+	Any characters, inc- luding new line

Anchor	Legend	Example	Sample Match
	Beginning of line (but means "not" inside ^bracket	cs)abc .*	abc (line start)
\$	End of line	.*? the end\$	this is the end
\A	Beginning of string	\Aabc\d\D*	abc (string start)
\Z	End of string	$\d\D$ *the end \Z	this is the end
\b	Word boundary	Bob.*\bcat\b	Bob ate the cat
\B	Not a word boundary	Bob.*\Bcat\B.*	Bobcats

Character	Legend	Example	Sample Match
:alpha:	Letters	[8:alpha:]+	WellDone88
:alnum:	Letters and numbers	[[:alnum:]]{10}	ABCDE12345

:punct:	Punctuation marks	[[:punct:]]+	?!.,:;	
---------	-------------------	--------------	--------	--

Modifier	Legend	Example	Sample Match
(?i)	Case-insensitive	(?i)Monday	monDAY
(?s)	The dot (.) matches new line characters (\r\r	n)(?s)From A.*to Z	From A to Z
(?m)	Treats the string as multiple lines, so that and \$ can match in several places	(?m)1\r\n2\$\r\n^3\$	1 2 3
(?x)	Comment mode (aka whitespace mode)	(?x) # this is a # comment abc # write on multipl # lines d # spaces must be # in brackets	abc d

Lookaround	Legend	Example	Sample Match
(?=	Positive lookahead	$(?=\d{10})\d{5}$	01234 in 01234 56789
(?<=	Positive lookbehind	(?<=\d)cat	cat in 1 cat
(?!	Negative lookahead	(?!theatre)the\w+	theme
(? </td <td>Negative lookbehind</td> <td><math>\w{3}(?<!--mon)ster</math--></math></td> <td>Munster</td>	Negative lookbehind	$\w{3}(?$	Munster

1.3. Styles


There perls & bash regexp styles, which are the common ones, maybe. There are other styles (vim, R, ...), but I don't plan to be fully comprehensive, here, since most styles are similar or can be run in perl-style with some flag/param/argument.

1.4. Ubuntu

Packages in Ubuntu 13.10 to help with regular expressions:

1.4.1. codeblocks-contrib: Regular expression testbed


http://codeblocks.org[2]

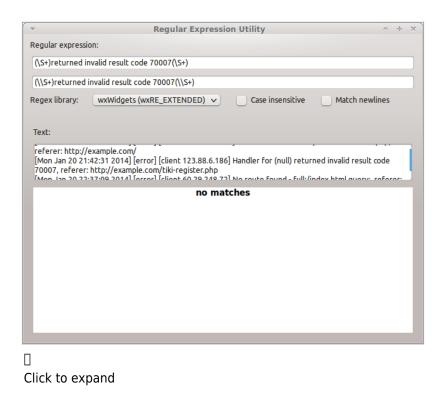

Plugin regexp for Codeblocks editor (Regular expression testbed)

1.4.2. kiki: Tool for python regular expression testing

http://project5.freezope.org/kiki (broken)

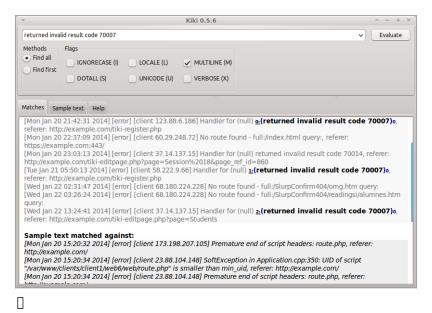

Click to expand


A free environment for regular expression testing (ferret). It allows you to write regexes and test them against a sample text, providing extensive output about the results. It is useful for several purposes:

- exploring and understanding the structure of match objects generated by the re module, making Kiki a valuable tool for people new to regexes.
- testing regexes on sample text before deploying them in code.

Kiki can function on its own or as plugin for the Spe Python editor.

1.4.3. redet: regular expression development and execution tool

http://www.billposer.org/Software/redet.html[3]

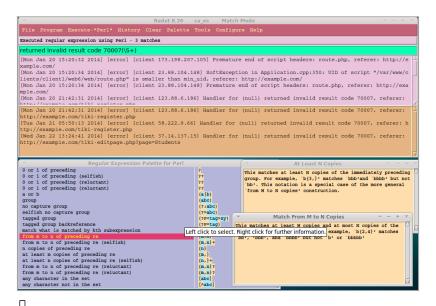

Click to expand



Redet allows the user to construct regular expressions and test them against input data by executing any of a variety of search programs, editors, and programming languages that make use of regular expressions. When a suitable regular expression has been constructed it may be saved to a file.

Redet stands for Regular Expression Development and Execution Tool. For each program, a palette showing the available regular expression syntax is provided. Selections from the palette may be copied to the regular expression window with a mouse click. Users may add their own definitions to the palette via their initialization file. Redet also keeps a list of the regular expressions executed, from which entries may be copied back into the regular expression under construction. The history list is saved to a file and restored on startup, so it persists across sessions.

So long as the underlying program supports Unicode, Redet allows UTF-8 Unicode in both test data and regular expressions.

1.4.4. rgxg: command-line tool to generate regular expressions

http://rgxg.sf.net[4]

rgxg (ReGular eXpression Generator) is a command-line tool to generate (extended) regular

expressions.

It can be useful to generate (extended) regular expressions to match for instance a specific number range (e.g. 0 to 31 or 00 to FF) or all addresses of a CIDR block (e.g. 192.168.0.0/24 or 2001:db8:aaaa::/64).

```
B
   xavi@coprinus:~$ rgxg
   Usage: rgxg COMMAND [ARGS]
   The available rgxg commands are:
     alternation
                      Create regex that matches any of the given patterns
     cidr
                      Create regex that matches all addresses of the given CIDR block
                      Escape the given string for use in a regex
     escape
                      Create regex that matches integers in a given range
     range
   Type 'rgxg help COMMAND' for help information on a specific command.
   Type 'rgxg version' to see the version of rgxg.
   xavi@coprinus:~$ rgxg help escape
   Usage: rgxg escape [options] STRING
        - h
                   display this help message
```

1.4.5. txt2regex: A Regular Expression "wizard", all written with bash2 builtins

```
[.]sortir [0]reiniciar [*]color
                                                                    ^txt2regex$
[|]o [(]obrir grup
                                                                sense suport
 RegEx perl
             : returned invalid result code 70007.*
 RegEx php
              : returned invalid result code 70007.*
 RegEx postgres: returned invalid result code 70007.*
 RegEx python : returned invalid result code 70007.*
 RegEx sed
              : returned invalid result code 70007.*
              : returned invalid result code 70007.*
     .o0(239)(@returned invalid result code 70007)
 [1-9]:

    gualsevol caràcter

   ) un caracter específic
   ) una cadena literal
   ) una llista de caràcters permesos
  ) una llista de caràcters prohibits
  ) una combinació especial
   ) una combinació POSIX (subjecte a localització)
    a ready RegEx (not implemented)
  ) qualsevol cosa
```


Click to expand

^txt2regex\$ is a Regular Expression "wizard", all written with bash2 builtins, that converts human sentences to RegExs. With a simple interface, you just answer to questions and build your own RegEx for a large variety of programs, like awk, emacs, grep, perl, php, procmail, python, sed and

vim. There are more than 20 supported programs.

1.4.6. visual-regexp: Interactively debug regular expressions

http://laurent.riesterer.free.fr/regexp/[5]

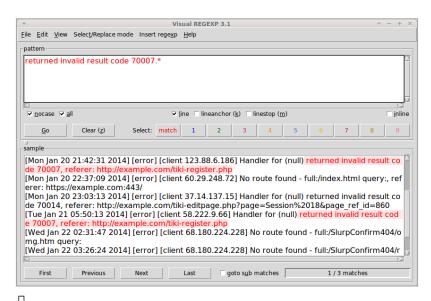

Click to expand

This Tcl script shows the result of running a regular expression, making debugging relatively easy. It also assists in the construction of regular expressions.

1.5. PHP online live regexp help

https://www.phpliveregex.com/[6]

1.6. Online tools

- https://regex101.com/^[7]
- https://regexr.com/^[8]
- https://www.regextester.com/^[9]

Alias names for this page:

regexp | regexps | Regular Expression | regexpr

^[1] http://www.rexegg.com/regex-quickstart.html

^[2] http://codeblocks.org

^[3] http://www.billposer.org/Software/redet.html

^[4] http://rgxg.sf.net

^[5] http://laurent.riesterer.free.fr/regexp/

[6] https://www.phpliveregex.com/

[7] https://regex101.com/

[8] https://regexr.com/

[9] https://www.regextester.com/